


HMCB5-63 高分断小型断路器 HIGH BREAKING CAPACITY MINI CIRCUIT BREAKER

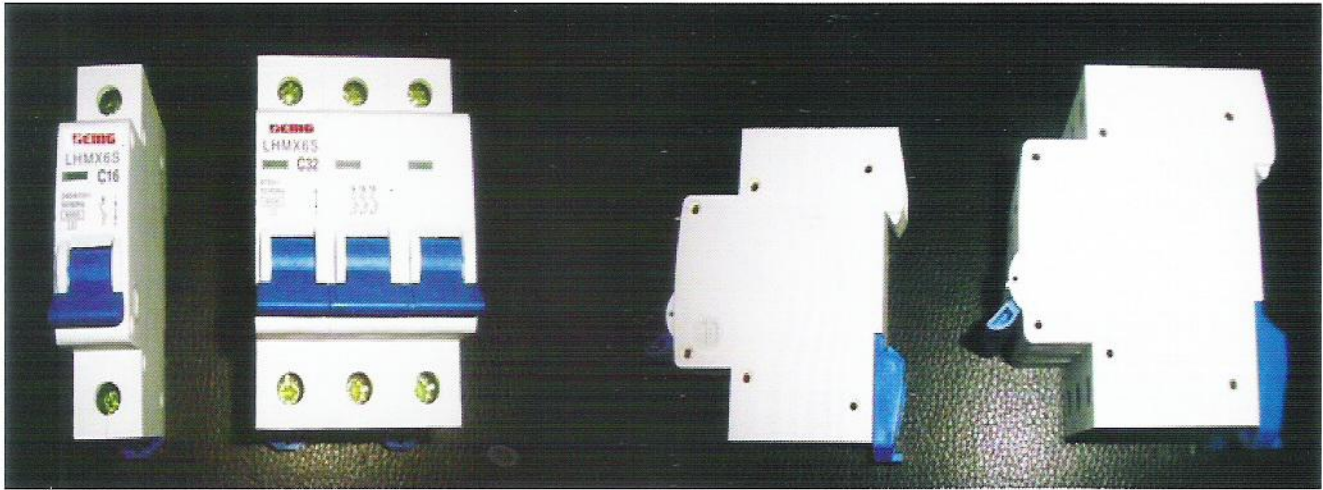

■ **适用范围 Scope**

主要适用于工业、商业、民用住宅等各种场所的电气线路的过载与短路起保护作用。

Mainly applied to industrial, commercial, residential and other areas of the electrical circuit from overload and short circuit protection.

■ **技术特性 Technical Characteristics**

符合的电气标准: EN60898, IEC60898

额定电压 (Ue): C240/415V (230/400V)

额定频率: 50/60HZ

额定分断能力: 6KA

脱扣特性: B, C, D 特性曲线

极数: 1P, 1P+N, 2P, 3P, 3P+N, 4P;

额定电流 In:

1A, 2A, 3A, 4A, 5 (6) A, 10A, 16A, 20A
25A, 32A, 40A, 50A, 63A

工作环境温度: -5 至 +40℃

外壳保护等级: 安装后为 IP40

寿命: 电气, 不少于 4000 次通断动作

机械, 不少于 10000 次通断动作

安装方式: 采用 IEC 标准导轨 35mm

端子形式: 两用端子可连接母排及导线

端子接线能力: 导线 1~25 mm²

母排厚度 0.8-2mm

手柄颜色可根据客户要求定制

Comply with standards: EN60898, IEC60898

Rated voltage (Ue): AC240/415V (230/400V):

Rated Frequency: 50/60HZ

Rated breaking capacity: 6KA

Tripping characteristic: B, C, D curve

Number of poles: 1P, 1P+N, 2P, 3P, 3P+N, 4P;

Rated Current In:

1A, 2A, 3A, 4A, 5 (6) A, 10A, 16A, 20A
25A, 32A, 40A, 50A, 63A

Working environment temperature: -5 to +40 °C

Enclosure protection class: IP40

Electrical Life ≥ 4000 on-off action

Mechanical Life ≥ 10000 on-off action

Installation: The IEC standard 35mm rail

Terminal Type: Dual-use terminal can be

connected to bus bar and wire
Wiring Terminal capacity: 1 ~ 25 mm²

Thickness of Busbar 0.8-2mm

Handle color can be customized according to customer requirements

安装尺寸 Outsize and Installing Dimension

